

MIXER SERIES SPECIFICATIONS

STENNER PUMPS®





7.5-Gallon



15-Gallon



30-Gallon

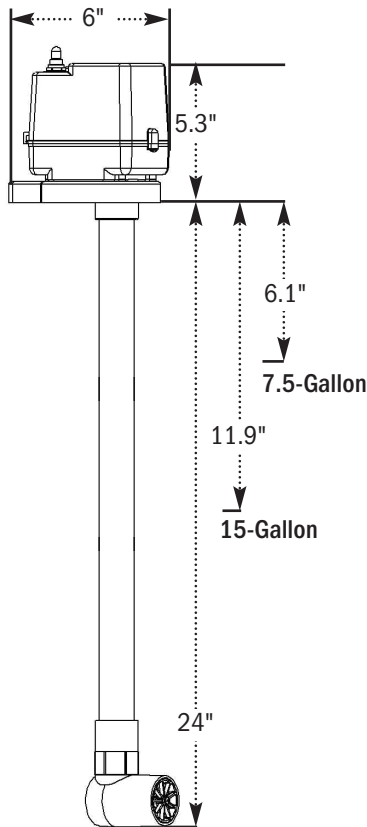

30-Gallon

MIXER MODELS

| Part Number | UM | Description |
|-------------|----|-----------------------|
| SMS75A | EA | 7.5-gallon, 120V 60Hz |
| SMS75B | EA | 7.5-gallon, 220V 60Hz |
| SMS15A | EA | 15-gallon, 120V 60Hz |
| SMS15B | EA | 15-gallon, 220V 60Hz |
| SMS30A | EA | 30-gallon, 120V 60Hz |
| SMS30B | EA | 30-gallon, 220V 60Hz |

MAXIMUM OPERATING TEMPERATURE

104° F (40° C)

MOTOR TYPE

1/30 HP, shaded pole, class B

MAXIMUM VISCOSITY

50 cps

DUTY CYCLE

Intermittent

MOTOR VOLTAGE (AMP DRAW)

120V 60Hz 1PH (1.7)

220V 60Hz 1PH (0.9)

POWER CORD PLUG END

120V 60Hz NEMA 5-15P

220V 60Hz NEMA 6-15P

POWER CORD TYPE

120V 60Hz, 220V 60Hz: SJTOW

MATERIALS OF CONSTRUCTION

Drive Enclosure Polycarbonate

Tank Mount PVC

Wetted Parts Nylon, Fiberglass, Santoprene™, PE, PVC, NSF approved or FDA compliant; Hastelloy™

DIMENSIONS AND SHIPPING WEIGHT

7.5-gallon 16 x 11 x 11 in. (40 x 27 x 27 cm); 6.6 lbs (3.0 kg)

15-gallon 22 x 11 x 11 in. (55 x 27 x 27 cm); 7.4 lbs (3.4 kg)

30-gallon 33 x 11 x 11 in. (84 x 27 x 27 cm); 9.4 lbs (4.3 kg)

* Santoprene® is a registered trademark of Exxon Mobil Corporation.

** Hastelloy® is a registered trademark of Haynes International, Inc.