

# MULTIPLE APPLICATIONS

## WITH A COMPACT PUMP

The Econ FX and Econ VX are ideal for light duty applications in swimming pools, food & beverage, metal finishing, irrigation & horticulture and more.

- Internal power supply
- Wall mountable
- cULus for indoor/outdoor use
- CE listed


### Effortless Tube Replacement



The patented quick release pump head design offers effortless tube replacement plus a solid one piece tube construction.



Fixed Speed

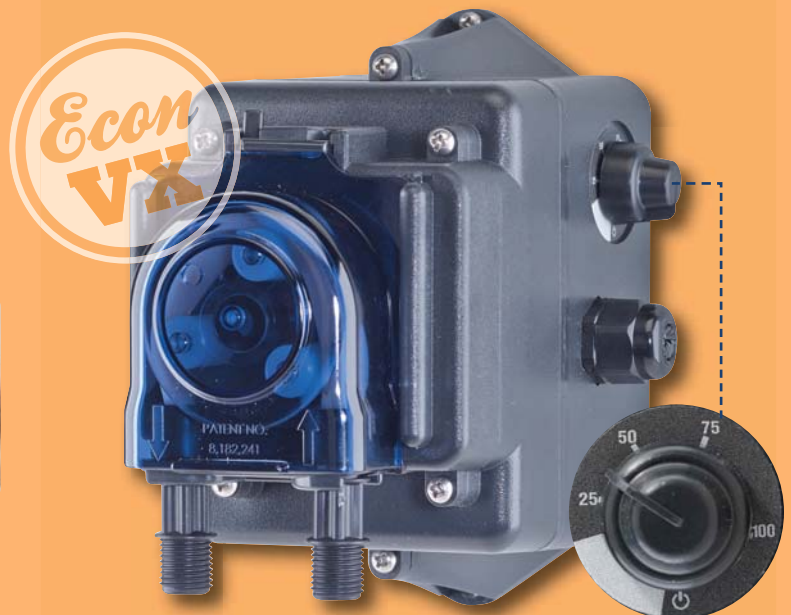


Variable Speed

- Self-priming to 25 feet (7.6 m)
- Can run dry
- Output reproducibility  $\pm$  5%
- 4 lbs (1.8 kg)
- 5.2 x 4.4 x 5.9 in. (13.2 x 9.1 x 14.9 cm)

**Mounting Kit EC303**  
For Stenner Tank or wall mount

**Stand EC304**  
For horizontal display or wall mount  
*Vertical mount required for wet environments.*

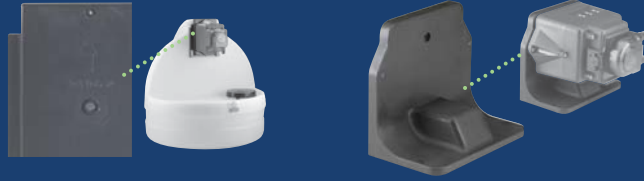

Optional mounting accessories sold separately

**Econ FX Flow Rate Output Charts**

Item Number Prefix	Pump Tube	Roller Assembly	Gallons per Day	Pressure psi	Liters per Day	Pressure bar
<b>E10FXA</b>	A	White	7.4	25	28.0	1.7
<b>E10FXB</b>	B	White	14.0	25	52.9	1.7
<b>E20FXB</b>	B	White	24.8	25	93.7	1.7
<b>E20FXC</b>	C	White	38.8	25	146.7	1.7
<b>E10FXH</b>	H	Black	14.0	80	52.9	5.5
<b>E20FXH</b>	H	Black	23.5	80	88.8	5.5


Approximate Maximum Outputs @ 50/60Hz

**Econ VX Flow Rate Output Charts**

Item Number Prefix	Pump Tube	Roller Assembly	Gallons per Day	Pressure psi	Liters per Day	Pressure bar
<b>E10VXA</b>	A	White	0.8 to 7.4	25	3.0 to 28.0	1.7
<b>E10VXB</b>	B	White	1.2 to 14.0	25	4.5 to 52.9	1.7
<b>E20VXB</b>	B	White	1.6 to 24.8	25	6.0 to 93.7	1.7
<b>E20VXC</b>	C	White	4.4 to 38.8	25	16.6 to 146.7	1.7
<b>E10VXH</b>	H	Black	1.7 to 14.0	80	6.4 to 52.9	5.5
<b>E20VXH</b>	H	Black	2.7 to 23.5	80	10.2 to 88.8	5.5

Approximate Maximum Outputs @ 50/60Hz

**Build An Item Number for the Pump or Tank System**

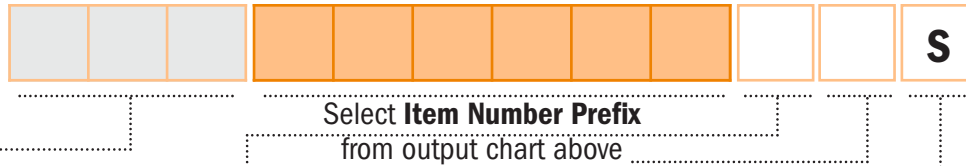

Omit if not ordering a Tank System

**Tank**

- S7G** 7.5-Gallon UV Gray
- S7N** 7.5-Gallon White
- S1G** 15-Gallon UV Gray
- S1N** 15-Gallon White
- S3G** 30-Gallon UV Gray
- S3N** 30-Gallon White

NOTE: Tanks also sold separately.

**Voltage & Hertz/Cord**

- A** 120V 60Hz
- C** 240V 50Hz; CE plug

**Suction & Discharge Tubing**

- 1** 1/4" White
- 2** 1/4" UV Black
- 5** 6 mm White *Europe*

**Tube Material**

**S** Santoprene®  
NOTE: Refer to chemical resistance guide for chemical compatibility.