

## POOL & SPA

Swimming Pools, Spas, Fountains, Aquatic Centers

### Sanitization and pH Adjustment


The process of sanitizing and maintaining proper pH in pools and spas goes hand in hand. The proper pH level increases the effectiveness of sanitizers and also helps to prevent premature wear of equipment and pool surfaces.

Stenner pumps are often utilized with ORP/pH controller to monitor and automatically activate a chlorine or acid metering pump. For over 60 years, Stenner peristaltic metering pumps have been utilized to maintain proper water chemistry in the aquatic industry.

### Enzyme Injection

Injecting enzyme formulas into pool or spa water helps maintain clean and clear water, decreases scum line build-up, and decreases chlorine usage. Enzyme injection reduces tile cleaning and can extend filter runs assisting with the pool maintenance and equipment upkeep.

The Econ T is a compact metering pump for injection based on time to dose liquid pool covers, inject enzymes or treat water features. The pump has an integral 7-day timer for programming 24 separate timed events. The programming flexibility allows control over the dosing time and dosing amounts for the most effective and efficient treatment schedule.

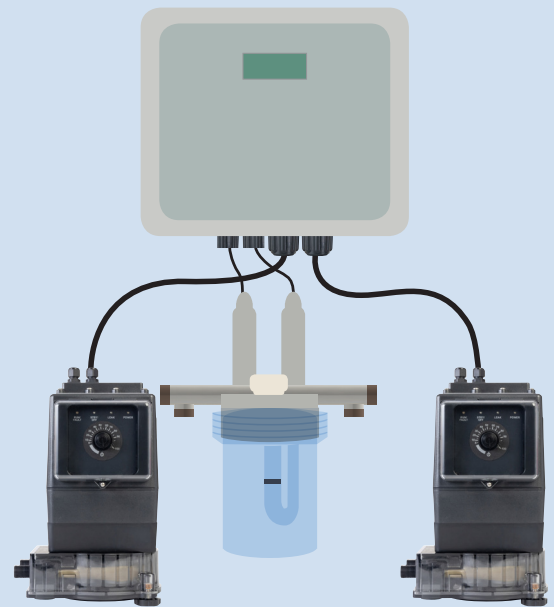

## THE STENNER PUMP ADVANTAGE

- ▶ Self-priming
- ▶ No vapor lock from off-gassing solutions
- ▶ No loss of prime
- ▶ Simple tube replacement
- ▶ Output reproducibility
- ▶ Output volume unaffected by back pressure
- ▶ Suction lift 25'

## S VARIABLE



### Highlights

- LED pump status indicators
- Three dedicated output relays
- Remote start and transfer
- Backup pump capability
- 20:1 turndown
- NEMA 4X
- Brushless DC motor

### Flow Rate Outputs

GPD	PSI
315	25
125	100
LPD	BAR
1192	1.7
473	6.9
maximums	

### Featuring Tube Leak Detection




Stops pump  
LED blinks red



Activates output replay

## CLASSIC ADJUSTABLE or CLASSIC FIXED

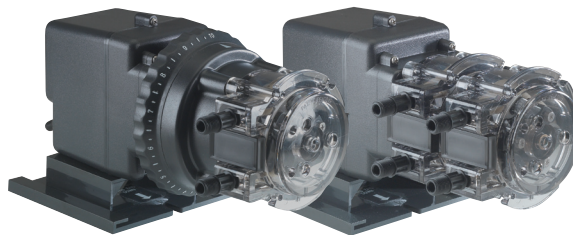

**SINGLE HEAD**  
Flow Rate Outputs

GPD	PSI
85	25
40	100
LPD	BAR
322	1.7
151	6.9
maximums	

**DOUBLE HEAD**  
Flow Rate Outputs

GPD	PSI
170	25
34	100
LPD	BAR
644	1.7
129	6.9
maximums	

### Highlights

- Electromechanical
- Adjustable
  - External dial ring
  - 20:1, 2.5% increments
- Interchangeable models
- Access sub-components, no tools
- Tank System available with single head pumps

## ECON T



### Highlights

- Programmable timer
- 7-day / 24-event
- Covered control panel
- Enclosed housing
- Tank System available

### Flow Rate Outputs

GPD	PSI
15	25
22	80
LPD	BAR
57	1.7
82	5.5
maximums	

## ECON PUMP STAND

Stand for flat surface or wall mount



## FLOW INDICATOR

Visual confirmation pump is injecting

