

ECON INTEGRATOR™

Flow Activated Proportional Injection Pump

Flow rate outputs up to 30 gallons/day max.

Adjustable 10% to 100% in 1% increments

Operating pressures up to 80 psi max.



Small Footprint

3 Operating Modes

SECONDS Mode

Accepts dry contact signal

Runs for programmed time in seconds

FLOW SWITCH Mode


Accepts dry contact signal

Runs at programmed speed

AUXILIARY Mode

Accepts 12-24 VAC/VDC signal


Runs at programmed speed

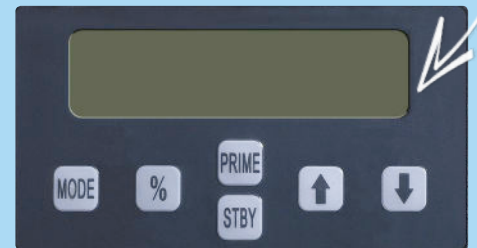

Repeater Relay

Pump receives a dry contact; relay repeats the signal to another device.

Operable in Seconds or Flow Switch mode.

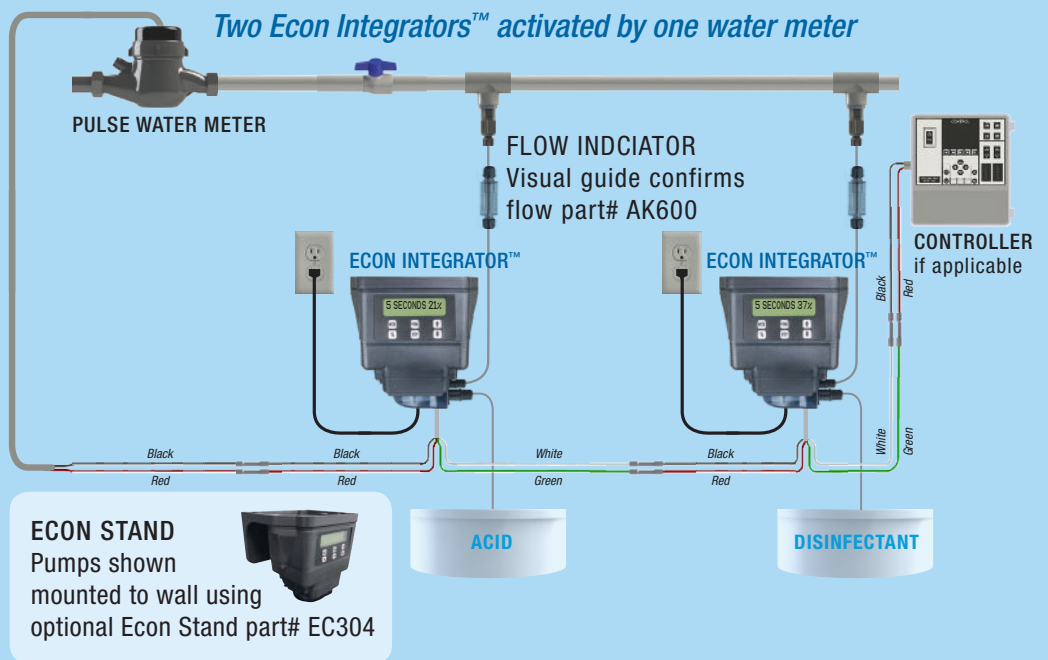



“How To” Videos
[stenner.com/
 resources/videos](http://stenner.com/resources/videos)

Patented quick release pump head for simple tube replacement without tools

Flow Rate Outputs ECON INTEGRATOR™ 80 psi (5.5 bar) max. Santoprene® tube only

Pump Prefix	Pump Tube	Roller Assembly	Turndown Ratio	GPD	GPH	oz/hr	oz/min	LPD	LPH	mL/hr	mL/min
E10RLM	M	White	10:1	0.49	0.02	2.6	0.04	1.84	0.08	76.7	1.3
E10RHM	M	White	10:1	0.83	0.03	4.4	0.07	3.14	0.13	130.8	2.2
E20RHM	M	White	10:1	1.41	0.06	7.5	0.13	5.36	0.22	223.2	3.7
E20RHF	F	White	10:1	4.5	0.19	24.0	0.40	17.01	0.71	708.8	11.8
E20RHG	G	Black	10:1	16.0	0.67	85.3	1.42	60.48	2.52	2520.0	42.0
E20RHH	H	Black	10:1	30.0	1.25	160.0	2.67	113.40	4.72	4725.0	78.8

Approximate maximum outputs @ 50/60Hz

Pump Build Item Number



code	Voltage & Hertz
7	120V 60Hz; 6' cord
8	120V 60Hz; 10' cord
B	230V 60Hz; 6' cord
5	24VDC; 1' cord

code	Suction & Discharge Tubing
1	1/4" White
2	1/4" UV Black
O.D. does not affect output.	

The Tank System and Meter System are not sold combined.

Tank System Build Item Number



code	Tank
S7G	7.5-Gallon UV Gray
S7N	7.5-Gallon White
S1G	15-Gallon UV Gray
S1N	15-Gallon White
S3G	30-Gallon UV Gray
S3N	30-Gallon White



Tanks also available separately

code	Voltage & Hertz
7	120V 60Hz; 6' cord
8	120V 60Hz; 10' cord
B	230V 60Hz; 6' cord

code	Suction & Discharge Tubing
1	1/4" White
2	1/4" UV Black
O.D. does not affect output.	

Meter System Build Item Number



code	Voltage & Hertz
7	120V 60Hz; 6' cord
8	120V 60Hz; 10' cord
B	230V 60Hz; 6' cord

code	Suction & Discharge Tubing
1	1/4" White
2	1/4" UV Black
O.D. does not affect output.	

code	Water Meter
71	3/4" 1 pulse/gallon
72	3/4" 2 pulses/gallon
74	3/4" 4 pulses/gallon
11	1" 1 pulse/gallon
12	1" 2 pulses/gallon
14	1" 4 pulses/gallon



System includes plastic water meter certified by IAPMO to ANSI/NSF 372

This information is not intended for specific application purposes. Stenner Pump Company reserves the right to make changes to prices, products, and specifications at any time without prior notice.

FEIG 041923