

# PRE-ASSEMBLED SYSTEM CONVENIENTLY MOUNTS TO THE WALL

Panel and wall mount brackets included


- pH Adjustment
- ✓ Iron Stain Removal
- Bacteria Reduction
- ✓ Oxidation

Cabinet keeps cords and wires contained

Unions for easy installation and removal

Chemical resistant polyethylene panel

30 & 100 mesh flushable filters included

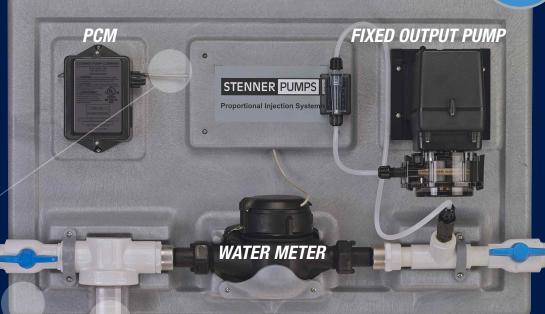












### ACCURATE AND REPEATABLE DOSES

The Proportional Injection System delivers precise dosing proportional to the system's flow rate based on water volume. The system is preassembled on a panel that conveniently mounts to the wall for timely installations and equipment accessibility.

## PROPORTIONAL INJECTION SYSTEM

#### **Build Item Number**



Item number is required for placing orders. To build item number, select code based on application requirements.

**System Type** 

S	Single	
D	Dual	

**Pump** 

	gpa	Ipa	Fixed
03	3	11.4	45MPHP2
05	5	18.9	85MPHP5
10	10	37.9	45MPHP10
17	17	64.4	85MPHP17
22	22	83.3	45MPHP22
40	40	151.4	85MPHP40

Pump and PCM Voltage

1	120V 60Hz

**PCM** 

	Seconds	Model	
01	0.1 to 1.0	PCM1	
05	0.5 to 5.0	PCM 5	
10	1.0 to 10.0	PCM 10	
20	2.0 to 20.0	PCM 20	

**Water Meter** 

341P	3/4" 1 pulse/gallon
342P	3/4" 2 pulses/gallon
344P	3/4" 4 pulses/gallon

#### **Specifications**

#### Materials

Panel & panel fittings: Polyethylene Mounting hardware: Stainless steel Piping and associated fittings: PVC

Plastic water meter: Certified by IAPMO to ANSI/NSF 372, low lead

Filter: PVC with polycarbonate cover and two polyester screens 30 and 100 mesh

NOTE: PVC connections are socket weld union 3/4" connections. Two 1" to 3/4" reducer couplings are included in the accessory kit to allow unit to adapt to 1" piping systems.

Dimensions: w x h

Single: 28" x 17.5" (71.1 x 44.5 cm)

Dual: 36.2" x 22.1" (91.9 x 56.2 cm)

#### **Shipping Weight**

Single: 29 lbs (13.2 kg) Dual: 42 lbs (19 kg)